


TECHNICAL DATA SHEET

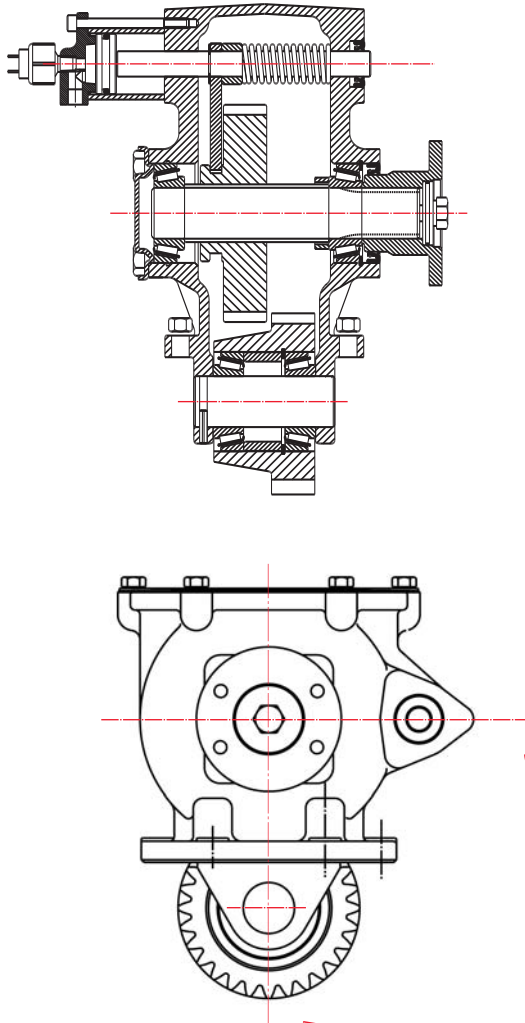

PTO DESIGNATION CODES
402 series PTO

PA 402 MKL23 A 13 *

Identifier
PA = PTO Side mount

PTO series
402

Gear Type
MK

Build
L = Left side of trans
2 = Selector to bottom
3 = Front to Centre - Position of gear in transmission

Engagement Type
A = Air
E = Electric/Air 24V

Output Type
08 = 8T Powauto Hydraulic Spline
09 = 14T 12/24 30° Spline + 35 x 60 Flange
10 = 14T 12/24 30° Spline + 1310 Series Flange
11 = 14T 12/24 30° Spline + 1410 Series Flange
12 = 14T 12/24 30° Spline + DIN 10 Flange
13 = 13T SAE B Hydraulic Spline + Mount
14 = 13T SAE B Hydraulic Spline
23 = DIN 5462 Pump Mount

Manufacturers Code
A = With pressure switch
B, C etc. (internal use only, if required)

For full details refer to owner's manual

Technical Specifications

Rating for intermittent Service

Torque (Nm / lb ft)	355/261
Power @ 500 rpm (kW / hp)	18.5/24.8
Power @ 1000 rpm (kW / hp)	37/49.7
Output Shaft Rotation	Opposite
Approximate Bare Mass (kg / lb)	9.0/20
Mounting Kit	MK1167

For full details refer to Powauto or consult your applications book.

Spare parts:

Seal Kit:

Bearing Kit:

Mounting Gasket Kit:

Seals & gaskets (minor overhaul)

Bearings/seals and gaskets (major overhaul)

Gears and shafts sold separately

SK065

BK065

GK017

TECHNICAL DATA SHEET



PRODUCT FEATURES

8-BOLT DEEP REACH SIDE MOUNT HIGH TORQUE POWER TAKE-OFF

The 402 series PTO is an extra deep reach PTO designed to fit the left opening of Hino LX06S transmissions.

SUITS:

Certain Hino transmissions.
(Refer to application e-Guide for details)

- **0.653 & 0.821 REDUCTION RATIO** (depending on transmission)
For very high torque at the output shaft
- **CONSTANT MESH**
With heavy duty bearings for longer life
- **WIDE VARIETY OF OUTPUTS**
To suit many vehicle configurations

402 SERIES POWER TAKE-OFF

DEALER: